

Technical data

CODE:

PRODUCT:

TURNTABLE SWD 100

NOTE:

TECHNICAL DATA

IMAGE:



LAST UPDATE:

3/2026

TURNTABLE SWD 100

Turntable SWD 100 for indoor use:

Due to its zinc die cast housing and rotating shaft supported by double ball bearing, the SWD 100 is a compact, universal and extremely robust turntable, suitable for indoors as a standing, hanging or wall mounted unit. The SWD 100 is a reliable turntable for various constructions, allowing up to 10 kg (22 lbs) centric load (up to 5 kg (11 lbs) if hanging mounted).

Features:

- zinc die cast housing
- very silent
- maintenance-free
- safety clutch
- turntable also suitable for ceiling or wall mounting
- optional: slip ring for rotating power supply max. 4 A (220-240 V = 900 W; 110 V = 440 W)


Technical Data

SWD 100 SWD 100 S

- max. centric load: 10 kg (22 lbs)
- max. centric hanging load: 5 kg (11 lbs)
- total height: 72 mm (2 27/32 ")
- nominal voltage: 220 to 240 V, 50 Hz, optional 115 V, 60 Hz
- motor power consumption: 4 W
- rotation speed: 2.5 rpm, rotating clockwise
- dead weight: 1.0 - 1.2 kg

Additional Features (on demand / on surcharge):

- country-specific plug
- housing white coated
- second power cord to use the slip ring separately
- rotation direction: counterclockwise
- other rotating speeds
- **further options on request**

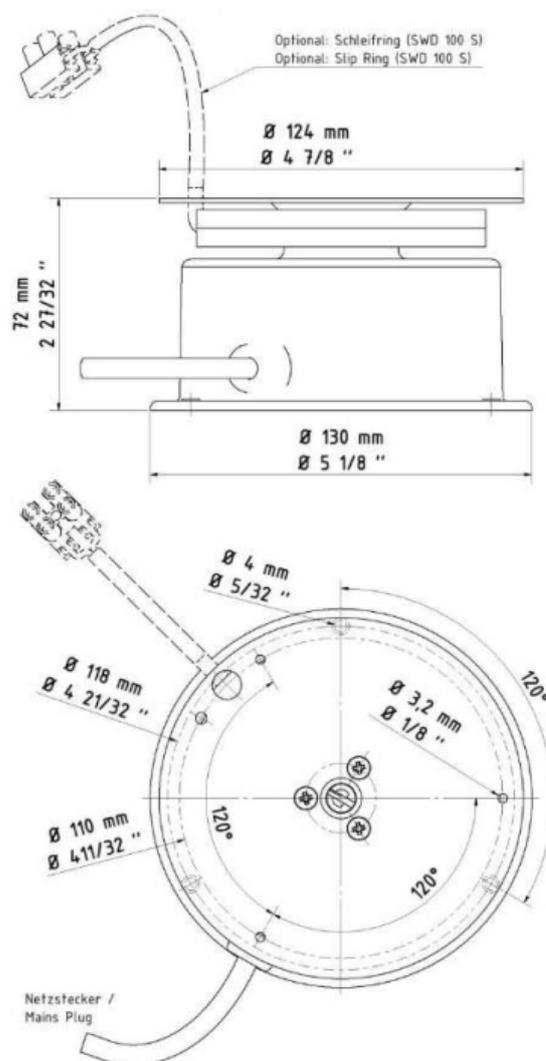

Technical Information:

For vertical installation (e.g. on the wall), a balanced load is required. Please contact manufacturer or reseller to check your specification. The rotation speed in the 60 Hertz grid (US version) is approx. 20% higher than in the 50 Hertz grid. Higher rotation speed can reduce the maximum load, so that the above mentioned characteristics are no longer valid.

