

Technical data

CODE:

519

PRODUCT:

TURNTABLE SW 500

NOTE:

TECHNICAL DATA

IMAGE:**LAST UPDATE:**

3/2026

TURNTABLE SW 500

Turntable SW 500 for indoor use:

The turntable SW 500 is applicable for up to 50 kg (110 lbs) centric load. Its massive base plate can be fixed to the ground. The shaft supported by 3 ball bearings is bending resistant and allows high pressure. It is available for indoor use in horizontal position, wall or ceiling mounted. The small radial tolerance guarantees a very precise rotation. The silent movement allows applications in quiet environments.

Features:

- white plastic housing
- metal base plate white coated and metal top plate
- very silent
- maintenance-free
- safety clutch
- optional: slip ring for rotating power supply max. 4 A (220-240 V = 900 W; 110 V = 440 W)


Technical Data

SW 500 SW 500 S

- max. centric load: 50 kg (110 lbs)
- max. centric hanging load: 25 kg (55 lbs)
- total height: 101 mm
- nominal voltage: 220 to 240 V, 50 Hz, optional 115 V, 60 Hz
- power consumption: 6 W
- rotation speed: 2.5 rpm, rotating clockwise
- dead weight: 3.3 - 3.9 kg

Additional Features (on demand / on surcharge):

- country-specific plug
- second power cord to use the slip ring separately
- cycle operation
- rotation direction: counterclockwise
- other rotating speeds
- manual switch: l (ccw) / off / r (cw)
- reversible operation
- **further options on request**

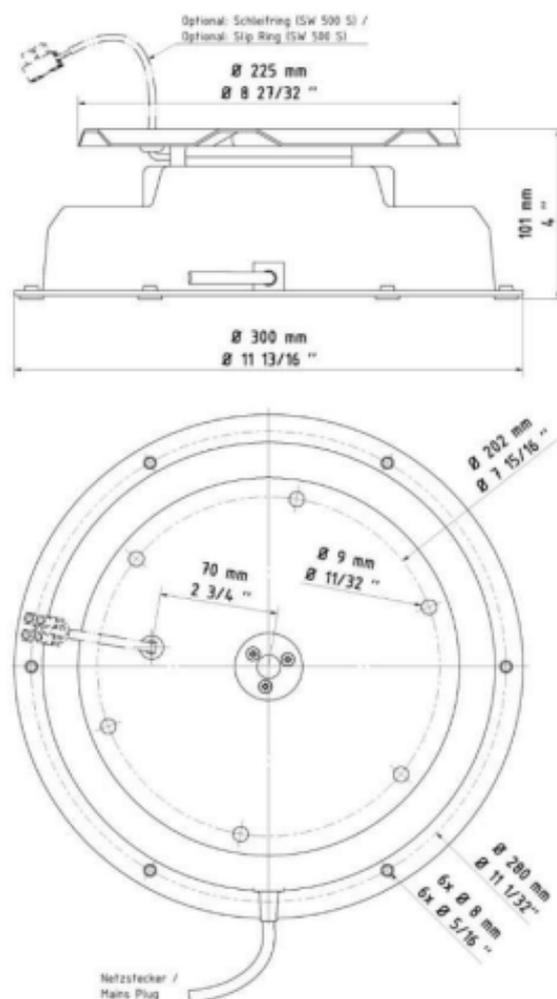

Technical Information:

For vertical installation (e.g. on the wall), a balanced load is required. Please contact manufacturer or reseller to check your specification. The rotation speed in the 60 Hertz grid (US version) is approx. 20% higher than in the 50 Hertz grid. Higher rotation speed can reduce the maximum load, so that the above mentioned characteristics are no longer valid.

