obchod@dencop.cz | +420 571 894 000
export@dencop.cz | +420 571 894 001

Technical data

CODE:	51301
PRODUCT:	LED STRIPS
NOTE:	TECHNICAL DATA
IMAGE:	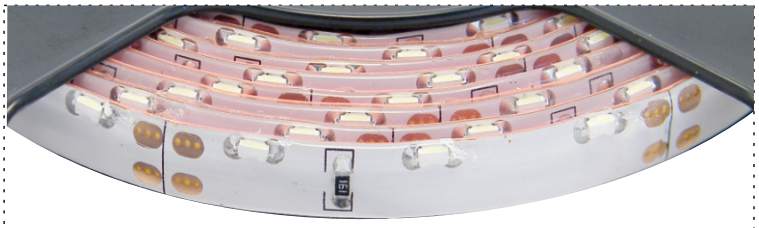
LAST UPDATE:	9/2021

LED STRIPS

CE | RoHS | DC 12V | 4,8 W | 60 LEDs | 8 mm | 3 years | 55 IP

Model 51301

Features:

- 3014 LED
- 5 SDCM, one Bin only
- 80 CRI
- 35 000 Hour life
- 3M adhesive backing tape
- CE, RoHS, UL approved



Bend Direction R_{min}= *60mm/2.36in*

Model	51301
Imput voltage	12 Vdc
Imput current	0,4A/1m & 2,0A/5mts
Power	Typ. 4,8W/m & max. 24W/5mts
Lumens /m	400Lm@6 000K
CRI	80
Beam angle	90°
Cutting unit	B = 50 mm/3 LEDs
Dimension	A = 16,67 mm; C = 8 mm; D = 1,3 mm
Copper foil	2 ounce
Dimmable	PWM & 1-10V
Temperature range	-25°C ~ 55°C / -13°F ~ 131°F
Energy efficency class	A+

Notes:

- The given data are typical value, due to tolerances of the production process and electrical components, values for light output can be ± 10% and electrical power can be ± 10%. Measurement uncertainty ± 5%. Values given for 1 m LED strips.
- If the electrical power more than 16W max./m must be used the heat sinking.

Color temperature (Kelvin)

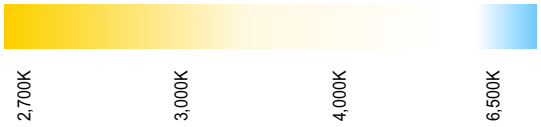

Packing info

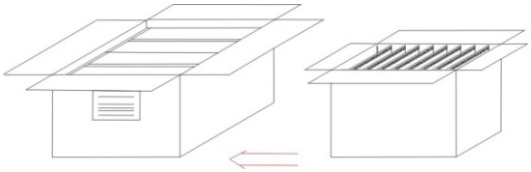

5 mts/ roll | *400 mts/ carton* | *G. W: 7,5 kgs*

Carton size: 45 x 25 x 26 cm | *CBM 0,0323*

CE | RoHS COMPLIANT | E488795 | Field Cuttable | DRY LOCATION RATED