DENCOP LIGHT & BUILDING


www.dencop.cz

& **BUILDING**

obchod@dencop.cz | +420 571 894 000 export@dencop.cz | +420 571 894 001

ACP BOND | PLEXIGLASS | PET G | PVC | LED MODULES | LED STRIPS | MEAN WELL | NEON

Technical data

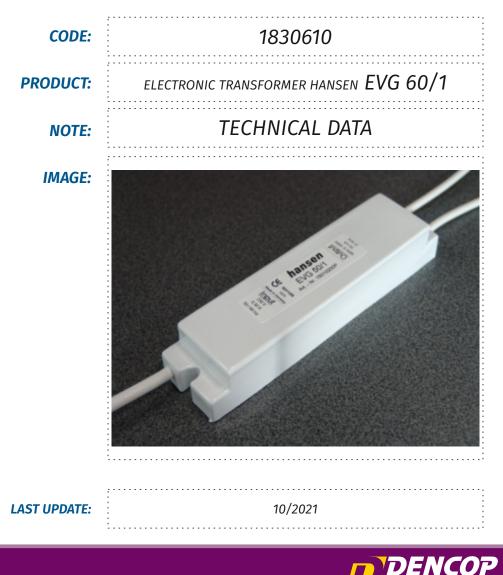

CATEGORY NEON ADVERTISING

ELECTRONIC TRANSFORMER EVG 60/1



Type:

Electronic transformer for neon tubes according to VDE 0712 Suitable for indoor and outdoor systems. Limited suitability for flash operation.

Weight: 0,37 kg

Radio interference suppression:

According to VDE 0875, Part 2A1 (EN 55015)

Temperatures:

Ambient temperature range: -25 to +55°C Temperature limit: +70°C (Max. ambient temp. that the EVG is able to withstand for a short period of time without being destroyed)

Housing:

Polystyrene shell Standard colour: white Sealing compound: polyurethane (black)

Class of protection: | Degree of protection: |P67

PROTECTIVE EQUIPMENT

Safety fuse: Integrated 1 A melting fuse offering protection against internal short circuits

CAUTION:

THE INSTALLATION INSTRUCTIONS MUST BE OBSERVED WHEN USING THE TRANSFORMER!

PRIMARY DATA

Mains voltage: 230 V, ± 10%, 50/60 Hz

Current consumption: Depends on the connected tube load; max. 0,40 A; cos phi 0,95

SECONDARY DATA

990 V with 60 mA constant current, symmetrical alternating current, load-depend operating frequency, 16-20 kHz, earthed secondary winding.

Secondary current tolerance: -5/+10% (of rated value)

Suitable for blue discharge tubes. Only partly suitable for red discharge tubes due to an occasional jelly bean effect.

CONNECTABLE TUBE LENGTHS (in meters):

Blue discharge (outdoor)									
Diameter			15	18	20	22			
1 Syst.	0,9	1,1	1,4	1,7	1,8	2,0			
2 Syst.	0,5	0,6	0,8	0,9	1,0	1,1			

Blue discharge (indoor)									
Diameter	10	12	15	18	20	22			
1 Syst.	1,2	1,5	1,8	2,1	2,3	2,5			
2 Syst.	0,8	1,0	1,2	1,4	1,5	1,6			

The values given represent the maximum connectable tube lengths which must not be exceeded. Shorter tube lengths, however, may be connected without any restrictions. The tube lengths are calculated on the basis of the 'Filling Pressure Recommendations for Fluorescent Tubes' published by the German Fachverband Lichtwerbung.

Housing dimensions



Housing colour: white Dimensions: 160 x 40 x 27 mm Packaging case: 2

Order no. 1830610 [EVG 60/1]



