

# Technical data

**CODE:**

831420

**PRODUCT:**

TRANSFORMER F/ART RESINBLOCK 1400/200

**NOTE:**

TECHNICAL DATA

**IMAGE:****LAST UPDATE:**

7/2023

# TRANSFORMER F/ART

## RESINBLOCK 200 mA - 1400 V

### DATA LABEL

Supply voltage	230	V
Frequency	50	Hz
Max. secondary current	170	mA
Short circuit current	221	mA
Max. ambient temperature	40	°C

### METRIC TABLE EXAMPLE

(for all the details please read our complete metric table)

Tube Ø mm <b>2x96T8</b>	Electrical meters
Gas: 50% Ne - 50% Ar	0
Tube Ø mm <b>0</b>	Electrical meters
Gas: 50% Ne - 50% Ar	0

### DIMENSIONAL DATA

Height x Width x Length	92 x 92 x 270	mm
Weight	5,4	kg

### INGRESS PROTECTION MARKING


IP code	44
European standard	EN 60529

### ELECTRICAL DATA

No load secondary voltage	700 - E - 700	V
Rated power	119	W
Primary rated current	1,14	A
Power VA	0	VA
P.F.C. primary capacitor	12,5	uF
P.F. corrected primary current	1	A
P.F. corrected Power VA	230	VA

### PROTECTION COMPILANT EN 50107-2

	TYPE
Internal protection device (Earth leakage)	PI08
Internal protection device (Earth leakage, Open circuit)	TP08
External protection device (Earth leakage)	PPE

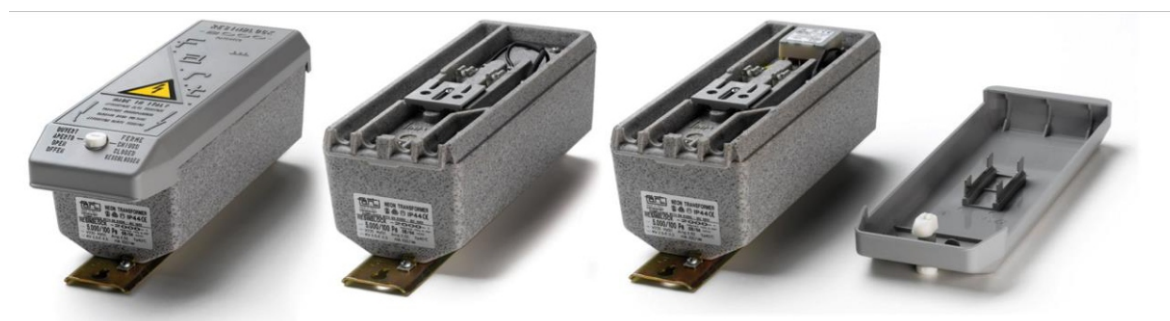

Compliant to the European and International Standards  
**EN 61050 & IEC 61050**  
 concerning transformers for tubular discharge  
 cold cathode with a voltage from 1 000 V to 10 000 V

# F/ART

2 years warranty  
 Ref. General sales conditions  
 Made in Italy

CE