

Technical data

CODE:

812537

PRODUCT:

TRANSFORMER F/ART RESINBLOCK 2500/37

NOTE:

TECHNICAL DATA

IMAGE:**LAST UPDATE:**

7/2023

TRANSFORMER F/ART

RESINBLOCK 37 mA - 2500 V

DATA LABEL

Supply voltage	230	V
Frequency	50	Hz
Max. secondary current	37	mA
Short circuit current	48,1	mA
Max. ambient temperature	40	°C

METRIC TABLE EXAMPLE

(for all the details please read our complete metric table)

Tube Ø mm 12	Electrical meters
Gas: 50% Ne - 50% Ar	3,4 - 4,1
Tube Ø mm 15	Electrical meters
Gas: 50% Ne - 50% Ar	3,6 - 4,3

DIMENSIONAL DATA

Height x Width x Length	77 x 92 x 270	mm
Weight	3,941	kg

INGRESS PROTECTION MARKING


IP code	44
European standard	EN 60529

ELECTRICAL DATA

No load secondary voltage	1250 - E - 1250	V
Primary rated current	0,485	A
P.F.C. primary capacitor	6,3	uF
P.F. corrected primary current	0,275	A
Rated power	58	W

PROTECTION COMPILANT EN 50107-2

	TYPE
Internal protection device (Earth leakage)	PI08
Internal protection device (Earth leakage, Open circuit)	TP08
External protection device (Earth leakage)	PPE

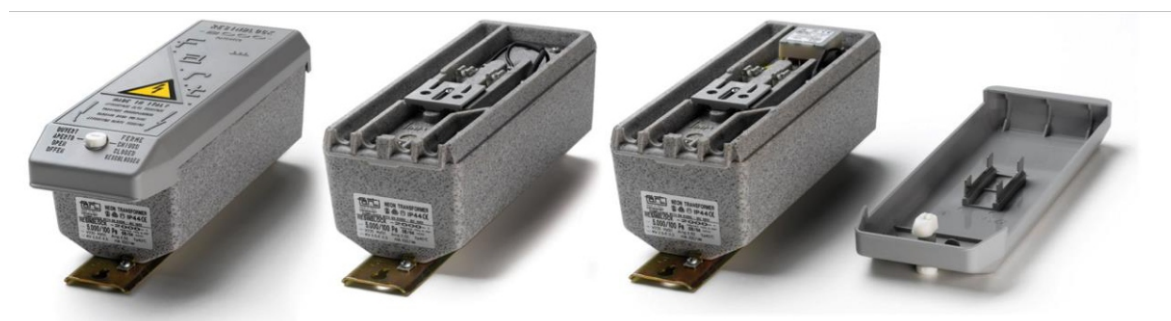

Compliant to the European and International Standards
EN 61050 & IEC 61050
 concerning transformers for tubular discharge
 cold cathode width a voltage from 1 000 V to 10 000 V

F/ART

2 years warranty
 Ref. General sales conditions
 Made in Italy

CE