

Technical data

CODE:

820360

PRODUCT:

TRANSFORMER F/ART RESINBLOCK 3000/60

NOTE:

TECHNICAL DATA

IMAGE:**LAST UPDATE:**

7/2023

TRANSFORMER F/ART

RESINBLOCK 60 mA - 3000 V

DATA LABEL

| | | |
|--------------------------|-----|----|
| Supply voltage | 230 | V |
| Frequency | 50 | Hz |
| Max. secondary current | 50 | mA |
| Short circuit current | 60 | mA |
| Max. ambient temperature | 40 | °C |

METRIC TABLE EXAMPLE

(for all the details please read our complete metric table)

| | |
|----------------------|-------------------|
| Tube Ø mm 15 | Electrical meters |
| Gas: 50% Ne - 50% Ar | 2,9 - 4,2 |
| Tube Ø mm 20 | Electrical meters |
| Gas: 50% Ne - 50% Ar | 3,3 - 4,6 |

DIMENSIONAL DATA

| | | |
|-------------------------|---------------|----|
| Height x Width x Length | 81 x 92 x 270 | mm |
| Weight | 3,985 | kg |

INGRESS PROTECTION MARKING


| | |
|-------------------|----------|
| IP code | 44 |
| European standard | EN 60529 |

ELECTRICAL DATA

| | | |
|--------------------------------|-----------------|----|
| No load secondary voltage | 1500 - E - 1500 | V |
| Primary rated current | 0,783 | A |
| P.F.C. primary capacitor | 10 | uF |
| P.F. corrected primary current | 0,34 | A |
| Rated power | 74 | W |

PROTECTION COMPILANT EN 50107-2

| | TYPE |
|---|------|
| Internal protection device (Earth leakage) | PI08 |
| Internal protection device (Earth leakage, Open circuit) | TP08 |
| External protection device (Earth leakage) | PPE |

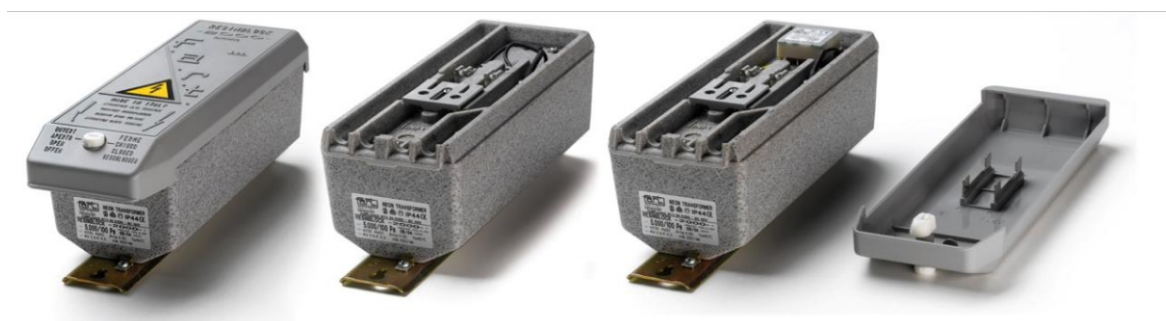

Compliant to the European and International Standards
EN 61050 & IEC 61050
 concerning transformers for tubular discharge
 cold cathode with a voltage from 1 000 V to 10 000 V

F/ART

2 years warranty
 Ref. General sales conditions
 Made in Italy

